

2000

HydrationStation™



FEATURES & BENEFITS

Sensor Operated

Electric sensor allows for touch-free hygienic operation, eliminating the need for manual activation under a number of circumstances.

Antimicrobially Protected

Specific components are antimicrobially protected using the natural protection of silver which helps protect against the growth of mold and mildew on those treated components.

Quality Control

The Hydration Station is pre-built and fully water and pressure tested to ensure no leaks and proper function for reduced installation time and added peace of mind.

Finish

#4 satin stainless steel back panel can be easily cleaned and maintained while also resisting corrosion.

Servicing

Durable ABS plastic front panel allows simple access to internal components. Hidden lock and hinges discourages vandals.



OPTIONS

- Model HCR8, chiller provides for instantaneous cooling to meet a continuous demand for chilled water.

To see all options for this model, visit www.hawesco.com.

SPECIFICATIONS

Model 2000 HydrationStation™ is a semi-recessed, bottle or cup filling station constructed of durable ABS plastic and 18 gauge, Type 304 Stainless Steel with a satin finish. It shall feature an electric sensor allowing for touch-free hygienic operation, laminar flow to prevent splashing, .8 gpm flow rate for quick fill-up, and antimicrobially protected components to prevent the growth of mold and mildew on those treated surfaces. Hidden lock and hinges on ABS front panel allows access to internal components and indicator light to notify when filter replacement is necessary. The mounting consists of heavy gauge galvanized steel frame, hardware and trap access panel. Tailpiece is 1-1/4" O.D. Provision for trap (not included) must be made in or behind wall.

APPLICATIONS

Perfect for either public or private indoor settings, the HydrationStation™ is a great fit in areas where aesthetics are important to the overall appeal of the architecture. This series is precisely mounted, making it a nice addition to any surrounding. Beautiful stainless steel and ABS construction helps to maintain the fountains overall appeal so it always remains looking as new as it did when it was installed. Specifically, this type of semi-recessed wall mounted bottle filling station would be ideal in settings such as: office buildings, airports, schools and other locations in and around office buildings.

Model 2000 meets the Americans with Disabilities Act for wheelchair access including side approach when mounted at the correct height. Haws manufactures drinking fountains, electric water coolers and electric drinking fountains to be lead-free by all known definitions including ANSI/ NSF Standard 61, Section 9, California Proposition 65 and the Federal Safe Drinking Water Act.




THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

NOTES:

1. FOR INDOOR USE ONLY.
2. HOLD ROUGH-IN DIMENSIONS ±1/8" (3.2mm).
3. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO. FOR INSTALLATION DIMENSIONS (LOCATIONS), WASTE, AND SUPPLY REQUIREMENTS OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY.
4. IF INSTALLED ABOVE A FOUNTAIN, HEIGHT DIMENSIONS ASSOCIATED WITH THE HYDRATION STATION WILL NOT BE ATTAINABLE. REFER FIRST TO DRINKING FOUNTAIN INSTALLATION DRAWING.

5. WHEN INSTALLING OR CHANGING FILTER CARTRIDGE, FLUSH SYSTEM FOR AT LEAST FIVE MINUTES TO PURGE ANY CARBON PARTICLES OR AIR BUBBLES.
6. REPLACE FUSES ONLY WITH 1-1/4" X 1/4" .025A TIME-DELAY FUSES (BUSSMANN MDL-1/4 OR EQUIVALENT).

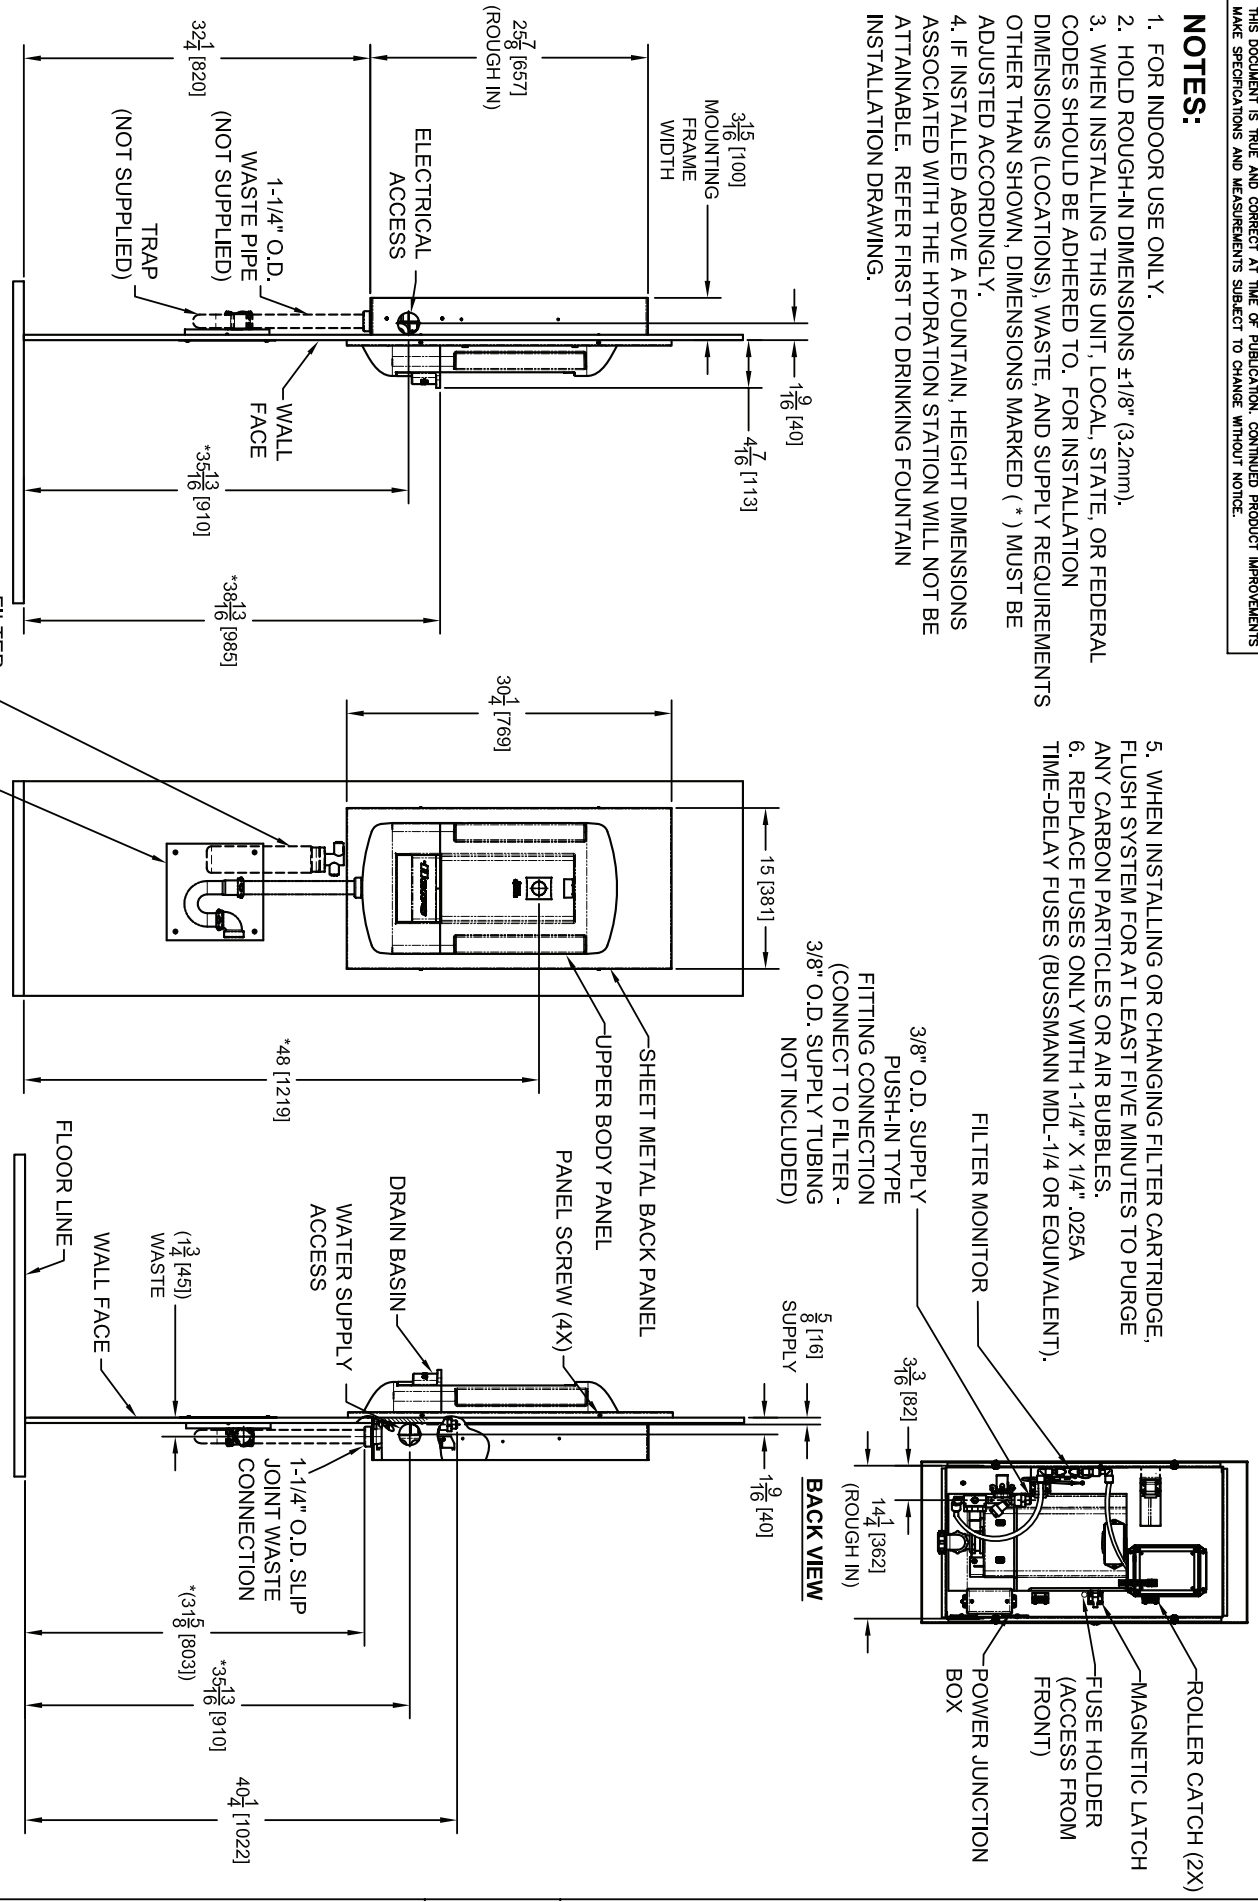

Haws Corporation

2000 HYDRATION STATION

INFO FAX : 1-888-FAX-HAWS (1-888-329-4297)

1455 Kierpe Ln, Sparks, NV, 89431
 Phone: 775-359-4712 Fax: 775-359-7424
 Haws Ag, Bachstr. 3, CH-3401 Burgdorf, Switzerland
 Haws Mfg Pte Ltd, 72 Sungai Kerdit, Lp, Singapore 729531
 e-mail: Haws@hawsco.com Website: www.hawsco.com

DATE	REV	BY	APP
4/18	1
9/08	2

SCALE: 1:15 DRAWING TYPE: INSTALLATION/BACK

MODEL(S): 2000 HYDRATION STATION

INFO FAX DOC #: 22000

002076600 D

15358A00 3